


## QTG Leak Check Gauge Kits



**QTG Kits** include a 30 psi and a 300 psi gauge, six pressure tap valves, a high pressure test block and a hose assembly. The hose assembly has an inlet swivel connection for attachment to the pressure tap valve and the outlet connection is a high pressure (300 psi) industrial quick disconnect coupling for attachment to either the 30 psi or 300 psi gauge.

The 30 psi gauge is used when testing at a pressure tap between the first and second stage regulator or intermediate pressure of a integral two stage regulator. Where there is no regulator pressure tap to use the 30 psi gauge, the 300 psi gauge is used with the TBA or TBB high pressure test block installed between the service valve and the pigtail.

**QTG127A &  
QTG128B**  
(Perfect for bobtail drivers)

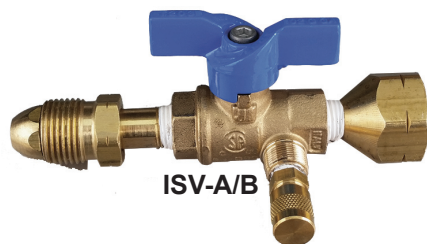

ISV-A/B

<b>ISV-A</b>	POL Isolation Valve w/Type A Schrader Test Tap, assembled
<b>ISV-B</b>	POL Isolation Valve w/Type B Test Tap, brass, assembled

QTG Leak Check Gauge Kits	
Part No.	Description
<b>QTG127A</b>	Includes: case with 1 - QHA hose assembly, 1 - GA30N 30 psi gauge 1 - GA300N 300 psi gauge 6 - VA1 1/8" NPT x Schrader pressure tap valves 1 - TBA high pressure test block
<b>QTG128B</b>	Includes: case with 1 - QHB hose assembly, 1 - GA30N 30 psi gauge 1 - GA300N 300 psi gauge 6 - VB1 1/8" NPT x 1/4" flare pressure tap valves 1 - TBB high pressure test block



OH 800-537-7518 | KY 800-448-9504 | IN 800-662-3252 | MO 800-821-3878 | MN 800-328-6291

Your questions answered by the people who know propane equipment.